

# Pluggable Single-Pole SPD FLP12.5-XXX/1(S) Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TN-S, TN-C, TT (only L-N)  
 Mode of Protection: L-PE, N-PE (only TN-S), L-PEN, L-N  
 Surge Ratings:  $I_{imp} =$  up to 12.5 kA (10/350  $\mu$ s)  
 $I_n =$  up to 20 kA (8/20  $\mu$ s)  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012

## Technical Data


FLP12.5-XXX/1(S)		75	150	275	320	385	440
IEC Electrical							
Nominal AC Voltage (50/60Hz)	U <sub>o</sub> /U <sub>n</sub>	60 V	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage (AC)	U <sub>c</sub>	75 V	150 V	275 V	320 V	385 V	440 V
Nominal Discharge Current (8/20 μs)	I <sub>n</sub>	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μs)	I <sub>max</sub>	50 kA	50 kA	50 kA	50 kA	50 kA	50 kA
Impulse Discharge Current (10/350 μs)	I <sub>imp</sub>	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA
Specific Energy	W/R	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	25 kJ/Ω	25 kJ/Ω
Charge	Q	6.25 As	6.25 As	6.25 As	6.25 As	5 As	5 As
Voltage Protection Level	U <sub>p</sub>	700 V	1000 V	1500 V	1600 V	1800 V	2000 V
Residual Current at U <sub>c</sub>	I <sub>PE</sub>	< 0, 5 mA					
Response Time	t <sub>A</sub>	< 25 ns					
Back-Up Fuse (max)		160 A gL / gG					
Short-Circuit Current Rating (AC)	I <sub>SCCR</sub>	25 kA					
TOV Withstand 5s	U <sub>T</sub>	114V	180V	335V	335V	335V	580V
TOV 120min	U <sub>T</sub>	114V	230V	440V	440V	440V	765V
	mode	Withstand	Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
Number of Ports		1					
Mechanical & Environmental							
Operating Temperature Range	T <sub>a</sub>	-40 °F to +158 °F [-40 °C to +70 °C]					
Permissible Operating Humidity	RH	5%...95%					
Atmospheric pressure and altitude		80k Pa ... 106k Pa / -500 m ... 2000 m					
Terminal Screw Torque	M <sub>max</sub>	39.9 lbf-in [4.5 Nm]					
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)					
		35 mm² (Solid, Stranded) / 25 mm² (Flexible)					
Mounting		35 mm DIN Rail, EN 60715					
Degree of Protection		IP 20 (built-in)					
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0					
Thermal Protection		Yes					
Operating State / Fault Indication		Green ok / Red defect					
Remote Contacts (RC)		Optional					
RC Switching Capacity		AC: 250V/0.5A; DC: 250V/0.1A; 125V/0.2A; 75V/0.5A					
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm²(Solid)					
Order Information							
Ordering Code		75	150	275	320	385	440
FLP12.5-XXX/1		1207511	1215011	1227511	1232011	1238511	1244011
FLP12.5-XXX/1S (with remote contacts)		1207512	1215012	1227512	1232012	1238512	1244012
FLP12.5-XXX/0 (spare modules)		1207501	1215001	1227501	1232001	1238501	1244001

FLP12.5-XXX/1(S)


Internal Configuration

Legend

- L Line
- N Neutral
- ⊕ Protective Earth
- S Signalling Contacts Optional

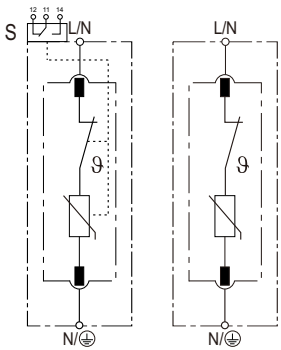


Dimensions & Packaging

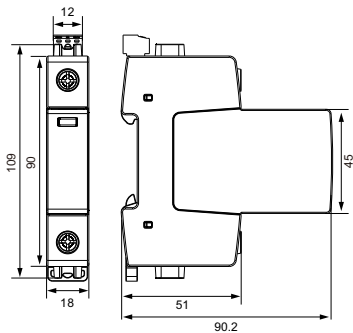


Dimensions & Packaging						
FLP12.5-XXX/1(S)	75	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]					
Minimum Order Quantity	48 Units					

Plug Internal Configuration

FLP12.5-XXX/0




Dimensions & Packaging



Dimensions & Packaging						
FLP12.5-XXX/0	75	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]					
Minimum Order Quantity	64 Units					

Connection Diagram

TN-S, TN-C, TT (Single-phase, 1+0)

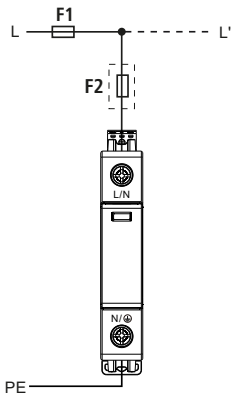

[mm]



Pluggable Multi-Pole SPD  
**FLP12.5-XXX/2(S)**  
 Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TN-S  
 Mode of Protection: L-PE, N-PE  
 Surge Ratings:  $I_{imp} =$  up to 12.5 kA (10/350  $\mu$ s)  
 $I_n =$  up to 20 kA (8/20  $\mu$ s)  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012


## Technical Data

FLP12.5-XXX/2(S)		75	150	275	320	385	440
IEC Electrical							
Nominal AC Voltage (50/60Hz)	U <sub>o</sub> /U <sub>n</sub>	60 V	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage (AC)	U <sub>c</sub>	75 V	150 V	275 V	320 V	385 V	440 V
Nominal Discharge Current (8/20 μs)	I <sub>n</sub>	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μs)	I <sub>max</sub>	50 kA	50 kA	50 kA	50 kA	50 kA	50 kA
Impulse Discharge Current (10/350 μs)	I <sub>imp</sub>	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA
Specific Energy	W/R	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	25 kJ/Ω	25 kJ/Ω
Charge	Q	6.25 As	6.25 As	6.25 As	6.25 As	5 As	5 As
Voltage Protection Level	U <sub>p</sub>	700 V	1000 V	1500 V	1600 V	1800 V	2000 V
Residual Current at U <sub>c</sub>	I <sub>PE</sub>	< 0, 5 mA					
Response Time	t <sub>A</sub>	< 25 ns					
Back-Up Fuse (max)		160 A gL / gG					
Short-Circuit Current Rating (AC)	I <sub>SCCR</sub>	25 kA					
TOV Withstand 5s	U <sub>T</sub>	114V	180V	335V	335V	335V	580V
TOV 120min	U <sub>T</sub>	114V	230V	440V	440V	440V	765V
	mode	Withstand	Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
Number of Ports		1					
Mechanical & Environmental							
Operating Temperature Range	T <sub>a</sub>	-40 °F to +158 °F [-40 °C to +70 °C]					
Permissible Operating Humidity	RH	5%...95%					
Atmospheric pressure and altitude		80k Pa ... 106k Pa / -500 m ... 2000 m					
Terminal Screw Torque	M <sub>max</sub>	39.9 lbf-in [4.5 Nm]					
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)					
		35 mm <sup>2</sup> (Solid, Stranded) / 25 mm <sup>2</sup> (Flexible)					
Mounting		35 mm DIN Rail, EN 60715					
Degree of Protection		IP 20 (built-in)					
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0					
Thermal Protection		Yes					
Operating State / Fault Indication		Green ok / Red defect					
Remote Contacts (RC)		Optional					
RC Switching Capacity		AC: 250V/0.5A; DC: 250V/0.1A;125V/0.2A;75V/0.5A					
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm <sup>2</sup> (Solid)					
Order Information							
Ordering Code		75	150	275	320	385	440
FLP12.5-XXX/2		1207521	1215021	1227521	1232021	1238521	1244021
FLP12.5-XXX/2S (with remote contacts)		1207522	1215022	1227522	1232022	1238522	1244022
FLP12.5-XXX/0 (spare modules)		1207501	1215001	1227501	1232001	1238501	1244001


FLP12.5-XXX/2(S)

Internal Configuration

- Legend
- L Line
  - N Neutral
  - Ⓢ/PE Protective Earth
  - S Signalling Contacts Optional

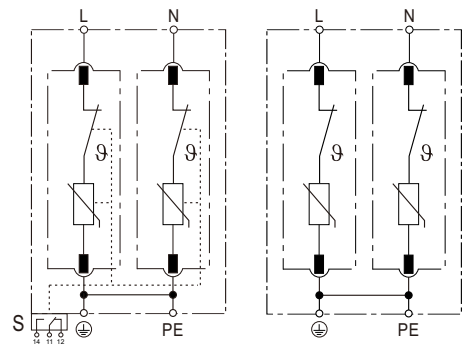


Dimensions & Packaging

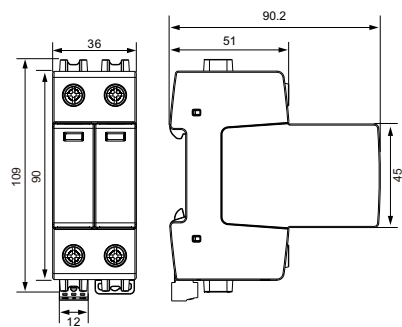


Dimensions & Packaging						
FLP12.5-XXX/2(S)	75	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (H×W×L)	[200 × 230 × 330 mm]					
Minimum Order Quantity	28 Units					

Plug Internal Configuration

FLP12.5-XXX/0




Dimensions & Packaging



Dimensions & Packaging						
FLP12.5-XXX/0	75	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (HxWxL)	[200 x 230 x 330 mm]					
Minimum Order Quantity	64 Units					

Connection Diagram

TN-S (Single-phase, 2+0)

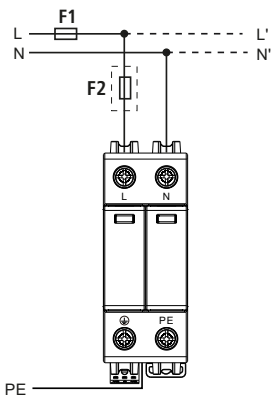

[mm]



# Pluggable Multi-Pole SPD FLP12.5-XXX/3(S) Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TN-C  
 Mode of Protection: L-PEN  
 Surge Ratings:  $I_{imp}$  = up to 12.5 kA (10/350  $\mu$ s)  
 $I_n$  = up to 20 kA (8/20  $\mu$ s)  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012


## Technical Data

FLP12.5-XXX/3(S)		150	275	320	385	440
IEC Electrical						
Nominal AC Voltage (50/60Hz)	U <sub>o</sub> /U <sub>n</sub>	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage (AC)	U <sub>c</sub>	150 V	275 V	320 V	385 V	440 V
Nominal Discharge Current (8/20 μs)	I <sub>n</sub>	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μs)	I <sub>max</sub>	50 kA	50 kA	50 kA	50 kA	50 kA
Impulse Discharge Current (10/350 μs)	I <sub>imp</sub>	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA
Specific Energy	W/R	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	25 kJ/Ω	25 kJ/Ω
Charge	Q	6.25 As	6.25 As	6.25 As	5 As	5 As
Voltage Protection Level	U <sub>p</sub>	1000 V	1500 V	1600 V	1800 V	2000 V
Residual Current at U <sub>c</sub>	I <sub>PE</sub>			< 0,5 mA		
Response Time	t <sub>A</sub>			< 25 ns		
Back-Up Fuse (max)				160 A gL / gG		
Short-Circuit Current Rating (AC)	I <sub>SCCR</sub>			25 kA		
TOV Withstand 5s	U <sub>T</sub>	180V	335V	335V	335V	580V
TOV 120min	U <sub>T</sub>	230V	440V	440V	440V	765V
	mode	Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
Number of Ports				1		
Mechanical & Environmental						
Operating Temperature Range	T <sub>a</sub>	-40 °F to +158 °F [-40 °C to +70 °C]				
Permissible Operating Humidity	RH	5%...95%				
Atmospheric pressure and altitude		80k Pa ... 106k Pa / -500 m ... 2000 m				
Terminal Screw Torque	M <sub>max</sub>	39.9 lbf-in [4.5 Nm]				
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)				
		35 mm² (Solid, Stranded) / 25 mm² (Flexible)				
Mounting		35 mm DIN Rail, EN 60715				
Degree of Protection		IP 20 (built-in)				
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0				
Thermal Protection		Yes				
Operating State / Fault Indication		Green ok / Red defect				
Remote Contacts (RC)		Optional				
RC Switching Capacity		AC: 250V/0.5 A; DC: 250V/0.1 A; 125V/0.2 A; 75V/0.5 A				
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm²(Solid)				
Order Information						
Ordering Code		150	275	320	385	440
FLP12.5-XXX/3		1215031	1227531	1232031	1238531	1244031
FLP12.5-XXX/3S (with remote contacts)		1215032	1227532	1232032	1238532	1244032
FLP12.5-XXX/0 (spare modules)		1215001	1227501	1232001	1238501	1244001


FLP12.5-XXX/3(S)

Internal Configuration

- Legend
- L Line
  - N Neutral
  - ⊕/PE Protective Earth
  - S Signalling Contacts Optional

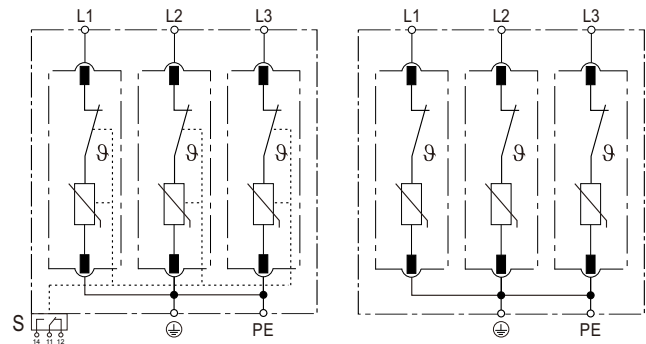


Dimensions & Packaging

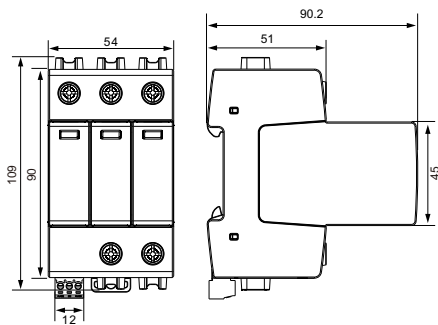


Dimensions & Packaging					
FLP12.5-XXX/3(S)	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]				
Minimum Order Quantity	20 Units				

Plug Internal Configuration

FLP12.5-XXX/0




Dimensions & Packaging



Dimensions & Packaging					
FLP12.5-XXX/0	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]				
Minimum Order Quantity	64 Units				

Connection Diagram

TN-C (Three-phase, 3+0)

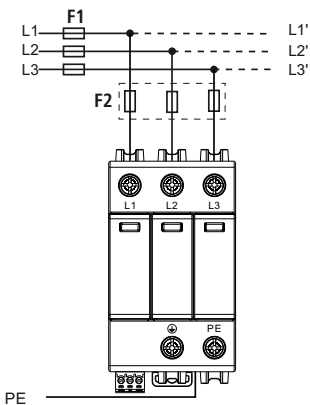

[mm]



# Pluggable Multi-Pole SPD FLP12.5-XXX/4(S) Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TN-S  
 Mode of Protection: L-PE, N-PE  
 Surge Ratings:  $I_{imp} =$  up to 12.5 kA (10/350  $\mu$ s)  
 $I_n =$  up to 20 kA (8/20  $\mu$ s)  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012


## Technical Data

FLP12.5-XXX/4(S)		150	275	320	385	440
IEC Electrical						
Nominal AC Voltage (50/60Hz)	U <sub>o</sub> /U <sub>n</sub>	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage (AC)	U <sub>c</sub>	150 V	275 V	320 V	385 V	440 V
Nominal Discharge Current (8/20 μs)	I <sub>n</sub>	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μs)	I <sub>max</sub>	50 kA	50 kA	50 kA	50 kA	50 kA
Impulse Discharge Current (10/350 μs)	I <sub>imp</sub>	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA
Specific Energy	W/R	39 kJ/Ω	39 kJ/Ω	39 kJ/Ω	25 kJ/Ω	25 kJ/Ω
Charge	Q	6.25 As	6.25 As	6.25 As	5 As	5 As
Voltage Protection Level	U <sub>p</sub>	1000 V	1500 V	1600 V	1800 V	2000 V
Residual Current at U <sub>c</sub>	I <sub>PE</sub>			< 0,5 mA		
Response Time	t <sub>A</sub>			< 25 ns		
Back-Up Fuse (max)				160 A gL / gG		
Short-Circuit Current Rating (AC)	I <sub>SCCR</sub>			25 kA		
TOV Withstand 5s	U <sub>T</sub>	180V	335V	335V	335V	580V
TOV 120min	U <sub>T</sub>	230V	440V	440V	440V	765V
	mode	Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
Number of Ports				1		
Mechanical & Environmental						
Operating Temperature Range	T <sub>a</sub>	-40 °F to +158 °F [-40 °C to +70 °C]				
Permissible Operating Humidity	RH	5%...95%				
Atmospheric pressure and altitude		80k Pa ... 106k Pa / -500 m ... 2000 m				
Terminal Screw Torque	M <sub>max</sub>	39.9 lbf-in [4.5 Nm]				
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)				
		35 mm² (Solid, Stranded) / 25 mm² (Flexible)				
Mounting		35 mm DIN Rail, EN 60715				
Degree of Protection		IP 20 (built-in)				
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0				
Thermal Protection		Yes				
Operating State / Fault Indication		Green ok / Red defect				
Remote Contacts (RC)		Optional				
RC Switching Capacity		AC: 250V/0.5 A; DC: 250V/0.1 A; 125V/0.2 A; 75V/0.5 A				
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm²(Solid)				
Order Information						
Ordering Code		150	275	320	385	440
FLP12.5-XXX/4		1215041	1227541	1232041	1238541	1244041
FLP12.5-XXX/4S (with remote contacts)		1215042	1227542	1232042	1238542	1244042
FLP12.5-XXX/0 (spare modules)		1215001	1227501	1232001	1238501	1244001


FLP12.5-XXX/4(S)

Internal Configuration

- Legend
- L Line
  - N Neutral
  - ⊕/PE Protective Earth
  - S Signalling Contacts Optional

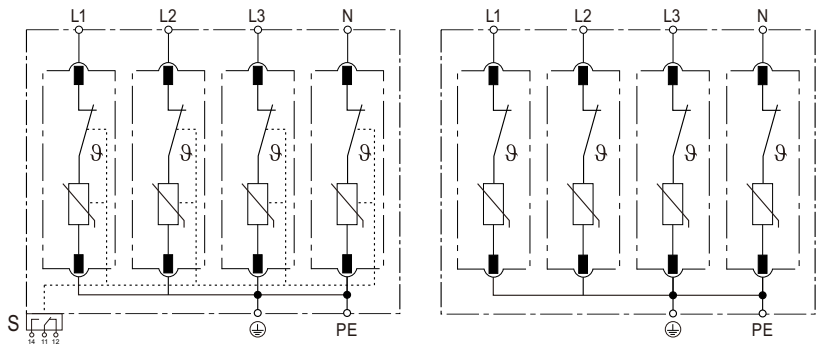


Dimensions & Packaging

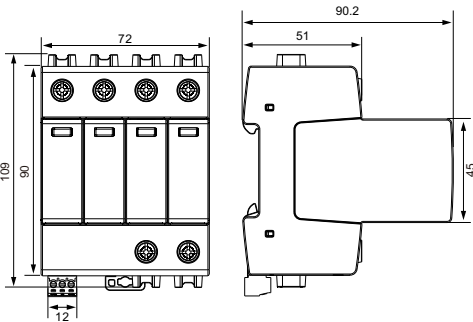


Dimensions & Packaging					
FLP12.5-XXX/4(S)	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]				
Minimum Order Quantity	16 Units				

Plug Internal Configuration

FLP12.5-XXX/0




Dimensions & Packaging



Dimensions & Packaging					
FLP12.5-XXX/0	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 x 230 x 330 mm]				
Minimum Order Quantity	64 Units				

Connection Diagram

TN-S (Three-phase, 4+0)

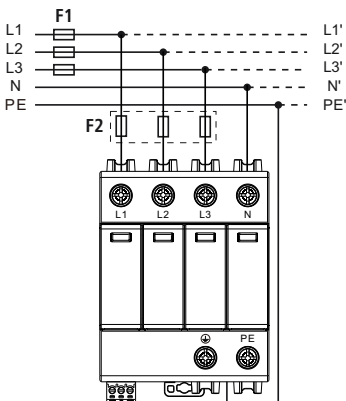

[mm]





# Pluggable Multi-Pole SPD FLP12.5-XXX/1(S)+1 Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TT, TN-S  
 Mode of Protection: L-N, N-PE  
 Surge Ratings:  $I_{imp} = 12.5 \text{ kA}$  (10/350  $\mu\text{s}$ )  
 $I_n = 20 \text{ kA}$  (8/20  $\mu\text{s}$ )  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV and GDT  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012

## Technical Data


FLP12.5-XXX/1(S)+1	75	150	275	320	385	440
<b>IEC Electrical</b>						
Nominal AC Voltage (50/60Hz)	60 V	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage	(L - N) $U_c$	75 V	150 V	275 V	320 V	385 V
	(N - PE) $U_c$			255 V		
Nominal Discharge Current (8/20 $\mu\text{s}$ )	(L - N) / (N - PE) $I_n$			20 kA / 25 kA		
Maximum Discharge Current (8/20 $\mu\text{s}$ )	(L - N) / (N - PE) $I_{max}$			50 kA / 50 kA		
Impulse Discharge Current (10/350 $\mu\text{s}$ )	(L - N) / (N - PE) $I_{imp}$	12.5 kA / 25 kA	12.5 kA / 25 kA	12.5 kA / 25 kA	12.5 kA / 25 kA	12.5 kA / 25 kA
Specific Energy	(L - N) / (N - PE) W/R			39 kJ/ $\Omega$ / 156 kJ/ $\Omega$		
Charge	(L - N)/(N - PE) Q			6.25 As / 12.5 As		
Voltage Protection Level	(L - N) / (N - PE) $U_p$	0.7kV / 1.5kV	1.0kV / 1.5kV	1.5kV / 1.5kV	1.6kV / 1.5kV	1.8kV / 1.5kV
Follow Current Interrupt Rating	(N-PE) $I_{fi}$			100A <sub>RMS</sub>		
Residual Current at $U_c$	$I_{PE}$			none		
Response Time	(L - N)/(N - PE) $t_A$			< 25 ns / < 100 ns		
Back-Up Fuse (max)				160 A gL / gG		
Short-Circuit Current Rating (AC)	(L - N) $I_{SCCR}$			25 kA		
TOV Withstand 5s	(L - N) $U_T$	114V	180V	335V	335V	580V
TOV 120min	(L - N) $U_T$	114V	230V	440V	440V	765V
	mode	Withstand	Safe Fail	Safe Fail	Safe Fail	Safe Fail
TOV Withstand 200ms	(N - PE) $U_T$			1200V		
Number of Ports				1		
<b>Mechanical &amp; Environmental</b>						
Operating Temperature Range	$T_a$			-40 °F to +158 °F [-40 °C to +70 °C]		
Permissible Operating Humidity	RH			5%...95%		
Atmospheric pressure and altitude				80k Pa ... 106k Pa / -500 m ... 2000 m		
Terminal Screw Torque	$M_{max}$			39.9 lbf-in [4.5 Nm]		
Conductor Cross Section (max)				2 AWG (Solid, Stranded) / 4 AWG (Flexible)		
				35 mm <sup>2</sup> (Solid, Stranded) / 25 mm <sup>2</sup> (Flexible)		
Mounting				35 mm DIN Rail, EN 60715		
Degree of Protection				IP 20 (built-in)		
Housing Material				Thermoplastic: Extinguishing Degree UL 94 V-0		
Thermal Protection				Yes		
Operating State / Fault Indication				Green ok / Red defect		
Remote Contacts (RC)				Optional		
RC Switching Capacity				AC: 250V/0.5 A; DC: 250V/0.1 A; 125V/0.2 A; 75V/0.5 A		
RC Conductor Cross Section (max)				16 AWG (Solid) / 1.5 mm <sup>2</sup> (Solid)		
<b>Order Information</b>						
Ordering Code	75	150	275	320	385	440
FLP12.5-XXX/1+1	1207513	1215013	1227513	1232013	1238513	1244013
FLP12.5-XXX/1S+1 (with remote contacts)	1207514	1215014	1227514	1232014	1238514	1244014
FLP12.5-XXX/0 (spare modules)	1207501	1215001	1227501	1232001	1238501	1244001
FLP25-255/0 (spare modules)	2525502	2525502	2525502	2525502	2525502	2525502

## FLP12.5-XXX/1(S)+1


### Internal Configuration

#### Legend

- L Line
- N Neutral
- ⊕/PE Protective Earth
- S Signalling Contacts Optional

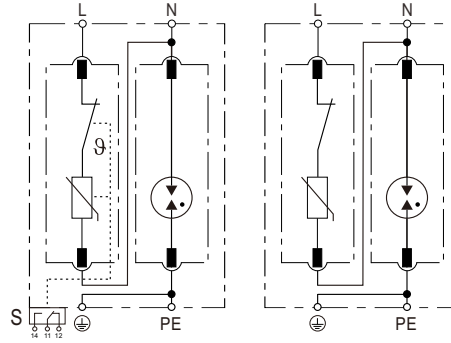

### Dimensions & Packaging

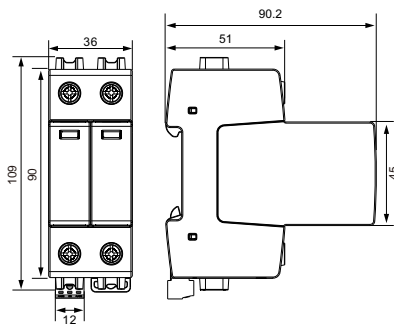


#### Dimensions & Packaging


FLP12.5-XXX/1(S)+1	75	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (HxWxL)	[200 x 230 x 330 mm]					
Minimum Order Quantity	28 Units					

### Plug Internal Configuration


#### FLP12.5-XXX/0



#### FLP25-255/0



### Dimensions & Packaging




#### Dimensions & Packaging

FLP12.5-XXX/0	75	150	275	320	385	440
FLP25-255/0	255					
Single Unit DIN 43880 Dimension	1 CTN					
Packaging Dimensions (HxWxL)	[200 x 230 x 330 mm]					
Minimum Order Quantity	64 Units					

### Connection Diagram

#### TN-S,TT (Single-phase, 1+1)

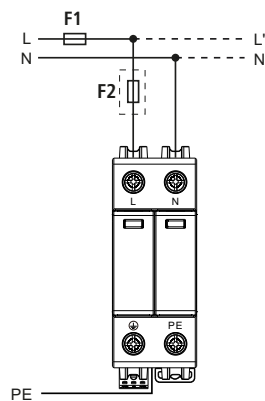

[mm]



# Pluggable Multi-Pole SPD FLP12.5-XXX/3(S)+1 Class I • Class II • Type 1 • Type 2



Location of Use: Main Distribution Boards  
 Network Systems: TT, TN-S  
 Mode of Protection: L-N, N-PE  
 Surge Ratings:  $I_{imp} = 12.5 \text{ kA}$  (10/350  $\mu\text{s}$ )  
 $I_n = 20 \text{ kA}$  (8/20  $\mu\text{s}$ )  
 IEC/EN Category: Class I+II / Type 1+2  
 Protective Elements: High Energy MOV and GDT  
 Housing: Pluggable Design  
 Compliance: IEC 61643-11:2011  
 EN 61643-11:2012

## Technical Data


FLP12.5-XXX/3(S)+1	150	275	320	385	440
<b>IEC Electrical</b>					
Nominal AC Voltage (50/60Hz)	120 V	230 V	230 V	230 V	400 V
Maximum Continuous Operating Voltage (L - N) $U_c$	150 V	275 V	320 V	385 V	440 V
(N - PE) $U_c$			255 V		
Nominal Discharge Current (8/20 $\mu\text{s}$ ) (L - N) / (N - PE) $I_n$			20 kA / 50 kA		
Maximum Discharge Current (8/20 $\mu\text{s}$ ) (L - N) / (N - PE) $I_{max}$			50 kA / 100 kA		
Impulse Discharge Current (10/350 $\mu\text{s}$ ) (L - N) / (N - PE) $I_{imp}$	12.5 kA / 50 kA	12.5 kA / 50 kA	12.5 kA / 50 kA	12.5 kA / 50 kA	12.5 kA / 50 kA
Specific Energy (L - N) / (N - PE) W/R			39 kJ / $\Omega$ / 625 kJ / $\Omega$		
Charge (L - N) / (N - PE) Q			6.25 As / 25 As		
Voltage Protection Level (L - N) / (N - PE) $U_p$	1.0 kV / 1.5 kV	1.5 kV / 1.5 kV	1.6 kV / 1.5 kV	1.8 kV / 1.5 kV	2.0 kV / 1.5 kV
Follow Current Interrupt Rating (N-PE) $I_{fi}$			100 A <sub>RMS</sub>		
Residual Current at $U_c$ $I_{PE}$			none		
Response Time (L - N) / (N - PE) $t_A$			< 25 ns / < 100 ns		
Back-Up Fuse (max)			160 A gL / gG		
Short-Circuit Current Rating (AC) (L - N) $I_{SCCR}$			25 kA		
TOV Withstand 5s (L - N) $U_T$	180V	335V	335V	335V	580V
TOV 120min (L - N) $U_T$	230V	440V	440V	440V	765V
	mode Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
TOV Withstand 200ms (N - PE) $U_T$			1200V		
Number of Ports			1		
<b>Mechanical &amp; Environmental</b>					
Operating Temperature Range $T_a$		-40 °F to +158 °F [-40 °C to +70 °C]			
Permissible Operating Humidity RH		5%...95%			
Atmospheric pressure and altitude		80k Pa ... 106k Pa / -500 m ... 2000 m			
Terminal Screw Torque $M_{max}$		39.9 lbf-in [4.5 Nm]			
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)			
		35 mm <sup>2</sup> (Solid, Stranded) / 25 mm <sup>2</sup> (Flexible)			
Mounting		35 mm DIN Rail, EN 60715			
Degree of Protection		IP 20 (built-in)			
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0			
Thermal Protection		Yes			
Operating State / Fault Indication		Green ok / Red defect			
Remote Contacts (RC)		Optional			
RC Switching Capacity		AC: 250V/0.5 A; DC: 250V/0.1 A; 125V/0.2 A; 75V/0.5 A			
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm <sup>2</sup> (Solid)			
<b>Order Information</b>					
Ordering Code	150	275	320	385	440
FLP12.5-XXX/3+1	1215033	1227533	1232033	1238533	1244033
FLP12.5-XXX/3S+1 (with remote contacts)	1215034	1227534	1232034	1238534	1244034
FLP12.5-XXX/0 (spare modules)	1215001	1227501	1232001	1238501	1244001
FLP50-255/0 (spare modules)	5025501	5025501	5025501	5025501	5025501

## FLP12.5-XXX/3(S)+1


### Internal Configuration

#### Legend

- L Line
- N Neutral
- ⊕/PE Protective Earth
- S Signalling Contacts Optional

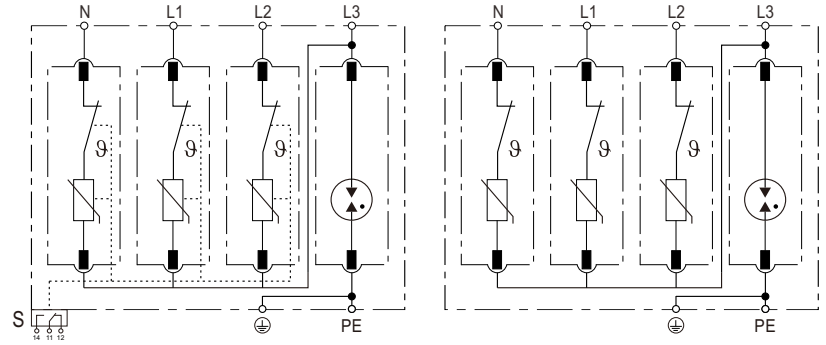

### Dimensions & Packaging

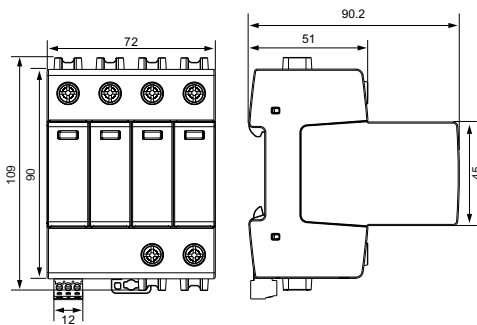


#### Dimensions & Packaging


FLP12.5-XXX/3(S)+1	150	275	320	385	440
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]				
Minimum Order Quantity	16 Units				

### Plug Internal Configuration


#### FLP12.5-XXX/0



#### FLP50-255/0



### Dimensions & Packaging




#### Dimensions & Packaging

FLP12.5-XXX/0	150	275	320	385	440
FLP50-255/0	255				
Single Unit DIN 43880 Dimension	1 CTN				
Packaging Dimensions (HxWxL)	[200 × 230 × 330 mm]				
Minimum Order Quantity	64 Units				

### Connection Diagram

#### TN-S, TT (Three-phase, 3+1)

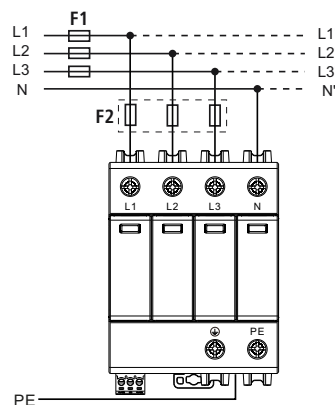

[mm]

